


热敏纸产品标准(Thermal Paper Specifications)

T058-01

ITEM		58g/m ²		NOTE	
定量 Base Weight	g/m ²	58±5%		ISO 536	
厚度 Caliper	μm	65±5%		ISO 534	
白度 Brightness	% ISO	≥81		ISO 2470	
水份 Moisture	%	6.5±1		ISO 287	
平滑度 Smoothness(Bekk)	S	≥250		ISO 5627	
抗张强度 Tensile Strength	MD	kN/m	≥3.0	ISO 1924	
撕裂强度 Tearing Strength	CD	mN	≥240	ISO 1974	
发色性能 Image Property	动发色 Dynamic Image	0.42mj/dot	O.D	≥1.16	TH-M2/N
	静发色 Static Image	70°C	O.D	≤0.20	SWT
		105°C	O.D	≥0.95	
保存性能 Durability	耐湿 Humidity Resistance	Back ground	O.D	≤0.20	40°C • 90%RH • 24h
		Printed part	O.D	≥0.90	
	耐热 Heat Resistance	Back ground	O.D	≤0.20	60°Cdry • 24h
		Printed part	O.D	≥0.75	
	耐光 Light Resistance	Back ground	O.D	≤0.20	5000Lux • 100h
		Printed part	O.D	≥0.90	

DYNAMIC SENSITIVITY

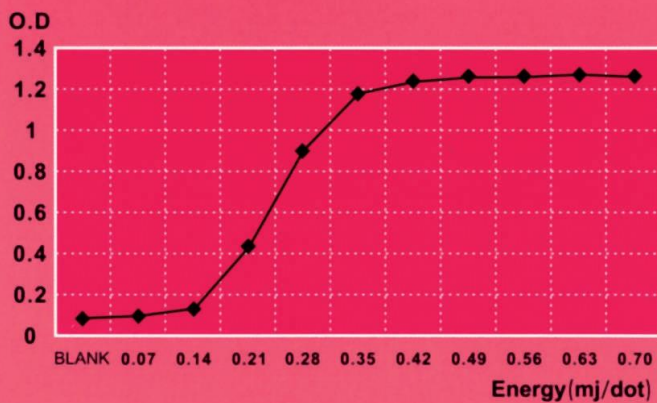

STATIC SENSITIVITY

